



# **T500** Walk-Behind Floor Scrubber

Deliver predictable results, extend machine life, and reduce cost of ownership with an innovative suite of technologies.

#### **Available Technologies**



ec-H2O NanoClean®



**Pro-Membrane**<sup>™</sup> or Pro-Panel™



**IRIS®** Asset Manager



Smart-Fill™ **Automatic Battery** Watering

## Productive & Versatile



#### 1. Solution Tank Auto-Fill

Reduce time spent trying to accurately fill the solution tank with auto-fill and water level monitor.

#### 2. Optimize Battery Performance

Increase battery life, extend battery run-time and easily optimize long-term battery performance with a nearly maintenance-free automatic battery watering system.

#### 3. Recovery Tank Rinse-Out

Quickly and easily clean recovery tank with optional on-board 53 psi spray nozzle and hose.

#### 4. Orbital Scrubbing

Optional orbital scrub head is ideal for daily cleaning or chemical-free floor finish removal.

#### 5. On-Demand Traning

Optional LCD Pro-Panel<sup>®</sup> resources include maintenance videos that make operator training and machine maintenance easy.

#### 6. Diamabrush<sup>™</sup> Technology

Help floors battered by grime and filth look like-new with Diamabrush tools.

#### **Get The Performance You Need**

Clean virtually any hard surface condition and maximize your return on investment with a wide range of cleaning heads.



**Cylindrical:** 28 in / 700 mm




**Dual disk:** 26 in / 650 mm & 28 in / 700 mm & 32 in / 800 mm



**Orbital:** 28 in / 700 mm

## Inside the T500

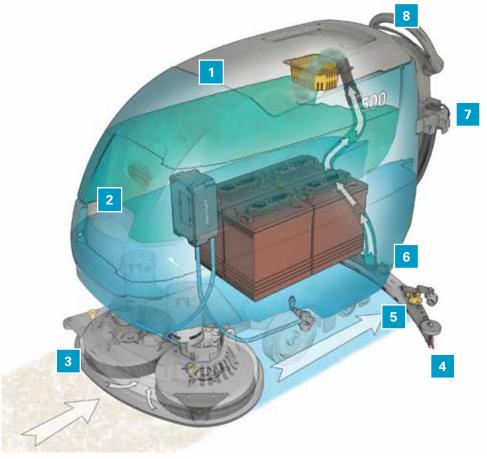

#### **1. Simplify Operation**

Easily clean Hygenic<sup>®</sup> tanks to help reduce mold, bacteria, and other contaminants.

#### 2. Recovery Hose

Easily fill your machine with an accessible port up front.

#### 3. Insta-Fit<sup>™</sup> Mount Heads

Quickly and ergonomically install disk pads and brushes with Insta-Fit<sup>™</sup> and gimbal mount heads.

#### 4. Reduce Risk of Slips & Falls

Virtually eliminate water drips with an integrated p-trap and up to a 4-second vacuum delay.

#### 5. Yellow Touch Points

Save time and ensure proper maintenance with yellow touch points.

#### 6. Foot Activated Squeegee

Easily and ergonomically lower and raise the foot activated squeegee.

#### 7. Accessory Tray

Keep the cleaning supplies you need on hand with the built-in accessory trays.

#### 8. Speed Settings

Improve operator ergonomics with propel switch and speed settings within easy reach.

### **T500** Specifications

	DUAL DISK			CYLINDRICAL	ORBITAL
	26 in/650 mm	28 in/700 mm	32 in/800 mm	28 in/700 mm	28 in/700 mm
Productivity (per hour) Theoretical Max	28,600 ft²/hr 2,657 m²/hr	30,800 ft²/hr 2,861m²/h	35,200 ft²/hr 3,270 m²/hr	30,800 ft²/hr 2,861 m²/h	30,800 ft²/hr 2,861 m²/hr
Estimated Coverage* Conventional	20,571 ft²/hr 1,911 m²/hr	22,286 ft²/hr 2,070 m²/h	25,714 ft²/hr 2,389 m²/hr	22,286 ft²/hr 2,070 m²/h	22,286 ft²/hr 2,070 m²/hr
Estimated Coverage* ec-H2O NanoClean®	23,124 ft²/hr 2,148 m²/hr	23,680 ft²/hr 2,200 m²/hr	27,323 ft²/hr 2,538 m²/hr	23,680 ft²/hr 2,200 m²/hr	23,680 ft²/hr 2,200 m²/hr
Scrub motor		2 x 34 VDC, 1.0 hp/.55 kW		2 x 24 VDC, .63 hp/.47 kW	1 x 24 VDC, .75 hp/.55 kW
Brush/pad RPM		220 rpm		1,500 rpm	2,200 rpm
Brush/pad pressure		40, 80, 120 lbs/18, 36, 54.5 kg		40, 80, 120 lbs/18, 36, 54.5 kg	110, 140, 170 lbs/50, 63.5, 77 kg
Solution tank capacity		22.5 gal / 85 L		22.5 gal / 85 L	22.5 gal / 85 L
Recovery tank capacity		27 gal / 102 L		27 gal / 102 L	27 gal / 102 L
Vacuum motor		24 VDC, .63 hp / .47 kW		24 VDC, .63 hp / .47 kW	24 VDC, .63 hp / .47 kW
Vacuum waterlift		46 in / 1170 mm		46 in / 1170 mm	46 in / 1170 mm
System voltage		24 volt		24 volt	24 volt
Battery run time (up to hours)**	5.9	5.9	5.4	5.4	4.9
Length x width x height	58.5 x 27.5 x 43.3 in 1,486 x 700 x 1,100 mm	59.1 x 29.5 x 43.3 in 1,501 x 750 x 1,100 mm	61.1 x 33.5 x 43.3 in 1,552 x 850 x 1,100 mm	59.1 x 30.7 x 43.3 in 1,501 x 780 x 1,100 mm	58.5 x 28 x 43.3 in 1,486 x 710 x 1,100 mm
Weight (with Batteries)	610 lb / 277 kg	620 lb / 281 kg	645 lb / 293 kg	660 lbs / 299 kg	660 lbs / 299 kg
Sound level (operator's ear)***		66.5 dBA		66.4 dBA	67.0 dBA
Quiet-Mode (operator's ear)***		61.7 dBA		61.8 dBA	60.6 dBA



ec-H2O NanoClean® technology is NFSI (National Floor Safety Institute) Certified

ec-H2O NanoClean technology is registered by NSF International \* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

\*\* Run times are based on continuous scrubbing run times

\*\*\* Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.Specifications subject to change without notice.

### Tennant-Reinvent how the world cleans

With a vision to become a global leader in sustainable cleaning innovation that empowers our customers to create a cleaner, safer and healthier world, Tennant creates solutions that are changing the way the world cleans.



#### We are where you are

Tennant has the industry's largest direct sales and service organization and a well-supported network of authorized distributors worldwide.

#### Buying, leasing, renting

We offer flexible options to get you the machines you need, however you need them.



### Solutions for your unique needs

Whatever your cleaning needs, Tennant offers a variety of high quality equipment to help you increase your cleaning productivity.



### Tennant*True*®

Optimize equipment performance and protect your investment with Tennant*True*<sup>®</sup> parts and service.

For a demonstration or additional information, call **+1.800.553.8033** or email **info@tennantco.com** 

t500-brochure-en-noam 8/19

©2019 The Tennant Company logo and other trademarks designated with the symbol "®" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors. All rights reserved.

#### Tennant

701 North Lilac Drive Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033 Quebec: +1.800.361.9050 Overseas: +1.763.540.1315

www.tennantco.com | info@tennantco.com