


Portico Nop

Timeless style, incredible flexibility, and unwavering performance: our popular Portico Nop is perfect for most any application.

Dense and thoughtfully crafted, Portico Nop offers classic appeal and performance that works great in entrances and wet-traffic areas. Made with 100% ASOTA™ polypropylene fibers, this carpet is UV stable, stain resistant, durable and a highly resilient non-woven carpet.

- Versatility in wet and high-traffic areas
- Provides extra-high dirt absorption
- Logo or plain matting options in a wide variety of colors

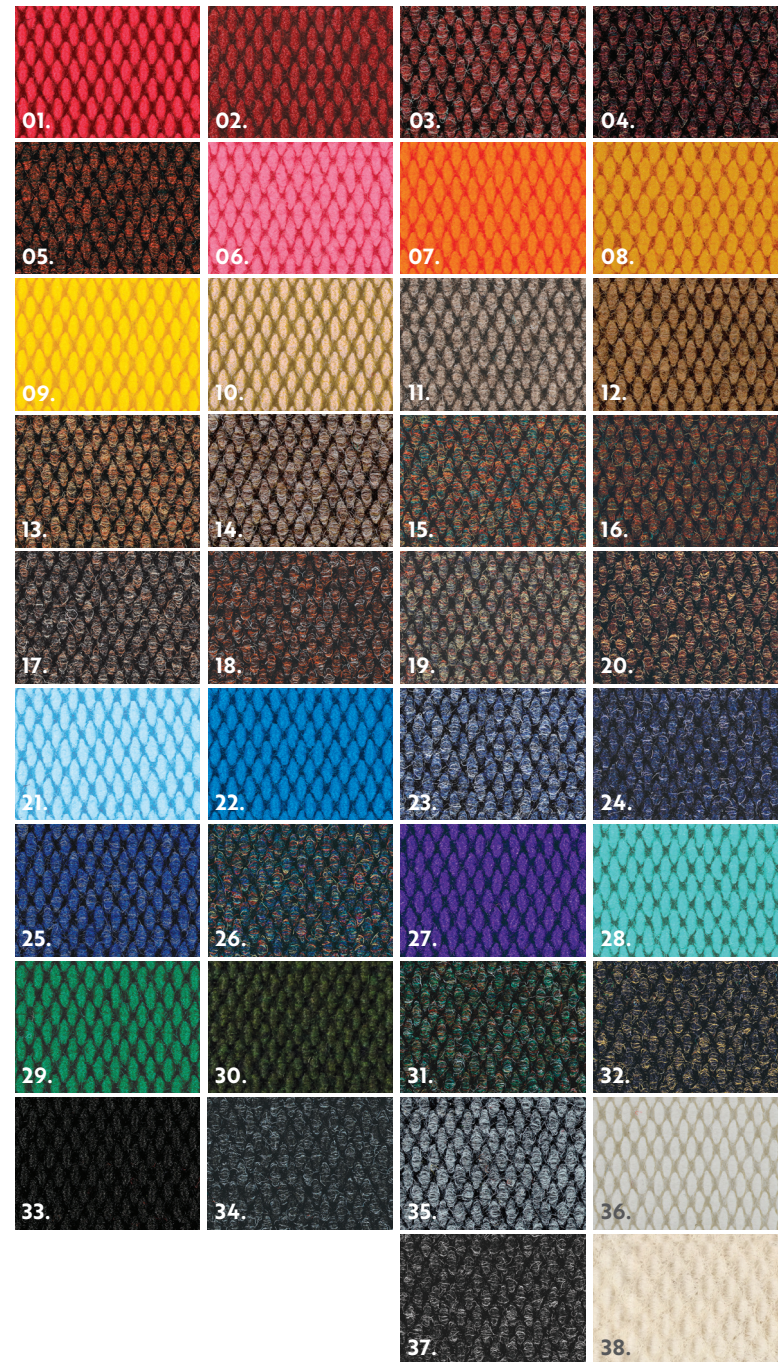

- | | |
|-------------------------------------|--|
| 01. Bright Red 3014 (PMS 192 C) | 23. Steel Blue 5157 (PMS 534 C) |
| 02. Solid Crimson 3031 (PMS 484 C) | 24. Midnight Blue 5154 (PMS 7546 C) |
| 03. Burgundy 3035 (PMS 209 C) | 25. Azure 5181 (PMS 540 C) |
| 04. Garnet 3138 (PMS 7645 C) | 26. Prism 5155 (PMS 295 C) |
| 05. Cardinal Red 3353 (PMS 7623 C) | 27. Purple 3090 (PANTONE™ Med. Purple) |
| 06. Pink 3091 (PMS 1905 C) | 28. Turquoise 6096 (PMS 325 C) |
| 07. Orange 3018 (PMS 144 C) | 29. Kelly Green (PMS 356 C) I |
| 08. Gold 1039 (PMS 7563 C) | 30. Verde Green 6043 (PMS 350 C) |
| 09. Yellow 1025 (PMS 121 C) | 31. Hunter Green 6022 (PMS 342 C) |
| 10. Sand 1064 (PMS 4665 C) | 32. Black Shadow 2343 (PMS Black 7 C) |
| 11. Taupe 2345 (PMS 408 C) | 33. Solid Black 2000 (PMS Black) |
| 12. Coir/Natural 1099 (PMS 467 C) | 34. Gris/Charcoal 2098 (PMS Black 6 C) |
| 13. Zinc 7006 (PMS 140 C) | 35. Sterling 2344 (PMS 430 C) |
| 14. Natural Beige 1153 (PMS 7530 C) | 36. White 1000 (PMS White) |
| 15. Loden 6081 (PMS Black 5 C) | 37. Carbon 9859 (NEW*) |
| 16. Rosewood 7178 (PMS 7589 C) | 38. Off White 1001 (NEW*) |
| 17. Teak 7185 (PMS 412 C) | |
| 18. Chocolate 7097 (PMS 7596 C) | |
| 19. Autumn 2048 (PMS 404 C) | |
| 20. Walnut 7068 (PMS 7519 C) | |
| 21. Sky Blue 5149 (PMS 291 C) | |
| 22. Royal Blue 5182 (PMS 285 C) | |

NOTE: PMS colors are subjective and listed for approximation only; they are not necessarily a match with actual product.



portico
SYSTEMS

Solutions that Simplify.

1+ 877 285 8899 • www.porticosystems.com

Custom Logo

Portico Nop

Portico Nop

> 54 OZ. ALL-WEATHER BERBER MATTING

SUGGESTED USES (NOT LIMITED TO)

Grab-and-Go areas, entryways, runners, lobbies, retail/department stores, etc.

Manufacturing Process:	Non-woven/needlepunched
Surface Aspect:	Hobnail (berber) pattern
Fiber:	100% Solution-dyed UV stabilized ASOTA™ polypropylene
Backing:	Premium composite rubber
Pile Height (± 0.5mm):	0.25"
Total Height (± 7.5%):	0.47"
Pile Weight (± 7.5%):	54 oz/sy
Total Weight (± 7.5%):	78 oz/sy
Sheet/Roll Width (± 2%):	6' 7" or 13' 2"

LIMITED WARRANTY

Full Commercial Warranty	1 year
Summary of Warranty	

Products must be professionally installed to validate the warranty.

Portico Systems warrants Portico Nop Sheet/Roll Goods against wear for a period of 1 year in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the Warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, Portico Systems will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
Portico Systems warrants Portico Nop materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This Warranty covers only properly installed & maintained floors
 - Portico Systems excluded and will not pay for any consequential or incidental expenses.
 - Portico Systems reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet

PACKING & DIMENSIONS

Sheet/Roll Width (± 2%):	6' 7" or 13' 2"
--------------------------	-----------------



TECHNICAL SPECIFICATIONS

Dimensional Stability (ASTM D7570-09):	Pass
Electrostatic Propensity (EN 1815):	>2kV
Electrical Resistivity (IBM / ICL):	Pass, for R.H. ≥40%
Sound Insulation (ISO 10140-1:2010):	≥21dB
Thermal Retention (ISO 11092):	0.15 m K/W Pass

COLOR FASTNESS

To Light (ISO 105 B02):	5
To Water (ISO 105 E01):	5
To Shampoo (ISO 105 C06):	4-5
To Rubbing (ISO 105 X12):	4 (Dry), 3-4 (Wet)

FLAMMABILITY RATING

Smoke Density (ASTM E662)	Pass
Surface Flammability (FF 1-70 / ASTM D2859)	Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

MAINTENANCE

Regular vacuuming (Weekly in low-traffic areas, and daily or twice daily in areas with higher traffic) with a motor-driven brush and beater bar can remove up to 80% of surface dirt, and is the easiest way to prolong the life of your carpet.

Regular vacuuming is key to maintaining your carpet, but eventually the carpet color dulls from dirt and grime stuck in the fibers. The dirt is then carried further into the building to form more soil reservoirs. Additionally, the oil content (15%) of the soil causes particles to stick to carpet fiber and resist vacuuming. To restore the carpet to its best condition, frequent light cleaning gives the best result and is often very cost effective.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

YOUR AUTHORIZED SALES REPRESENTATIVE:



experience it for yourself
Talk with your sales representative or request
samples at samples@porticosystems.com

Solutions that Simplify.

1+ 877 285 8899 • www.porticosystems.com

Custom Logo

Portico Nop